



LEDVANCE

2022

EDITION 1

# LEDVANCE PRODUCT CATALOGUE






# CONTENTS

<b>INTEGRATED DOWNLIGHTS</b>	<b>4</b>
<b>TRACK SPOT LIGHTS</b>	<b>9</b>
<b>LED BATTENS</b>	<b>10</b>
<b>PANELS</b>	<b>12</b>
<b>CEILING OYSTER</b>	<b>17</b>
<b>BULKHEAD</b>	<b>19</b>
<b>FLOODLIGHT</b>	<b>20</b>
<b>WEATHER PROOF BATTEN</b>	<b>22</b>
<b>HIGHBAY</b>	<b>25</b>
<b>LED STRIP</b>	<b>26</b>
<b>MOTION SENSORS</b>	<b>27</b>
<b>EMERGENCY LIGHTING</b>	<b>30</b>

# INTEGRATED LED DOWNLIGHTS

## FLAT TRI COLOUR

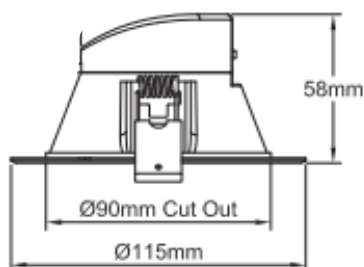

## AREAS OF APPLICATION

– Residential and commercial downlight suitable for both indoor and outdoor application including living areas, kitchens, laundry, bathrooms, garages, hallway and corridors, under outdoor soffits

## PRODUCT BENEFITS

- Adjustable colour temperature for a wide range of applications (selectable via slide switch Warm 3000K Cool 4000K Daylight 5000K)
- Luminous Efficacy: up to 106lm/W
- Lifetime up to 30,000hr
- 3yr Warranty




## PRODUCT FEATURES


Product Code	W	Lumen (Lm)	CCT	CRI	IP	IC Rating	Beam Angle	Lifetime (hrs)	Lm/W	Cutout (mm)	Dimmable	Material	Colour	Warranty
OSRO214729	8	850	3000 4000 5000	80	20/44	IC-4/F	90	3000	106	90	Yes	PC	White	3 years

# INTEGRATED LED DOWNLIGHTS


## RECESSED TRI COLOUR




OSRO398078



OSRO398153



OSRO389115




OSRO398191

## AREAS OF APPLICATION

– Residential and commercial downlight suitable for both indoor and outdoor application including living areas, kitchens, laundry, bathrooms, garages, hallway and corridors, under outdoor soffits

## PRODUCT BENEFITS

- Recessed diffuser with clean cutoff to minimize glare
- Adjustable colour temperature for a wide range of applications (selectable via 3CCT slide switch Warm 3000K Cool 4000K Daylight 5000K)
- Low Flicker integrated dimmable driver
- Easy to install - comes with flex and junction box/strain relief for easy push in terminal connection




## PRODUCT FEATURES


Product Code	W	Lumen (Lm)	CCT	CRI	IP	IC Rating	Beam Angle	Lifetime (hrs)	Lm/W	Cutout (mm)	Dimmable	Material	Colour	Warranty
OSRO398078	6	620	3000 4000 5000	80	20 /44	IC-4/F	80	30000	103	75	Yes	PC	White	5 years
OSRO398115	7.5	820	3000 4000 5000	80	20 /44	IC-4/F	80	30000	113	90	Yes	PC	White	5 years
OSRO398153	9	1100	3000 4000 5000	80	20 /44	IC-4/F	80	30000	122	110	Yes	PC	White	5 years
OSRO398191	11	1300	3000 4000 5000	80	20 /44	IC-4/F	80	30000	118	125	Yes	PC	White	5 years

# INTEGRATED LED DOWNLIGHTS

## GIMBLE SINGLE COLOUR

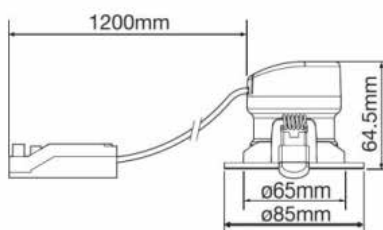

OSRO214873

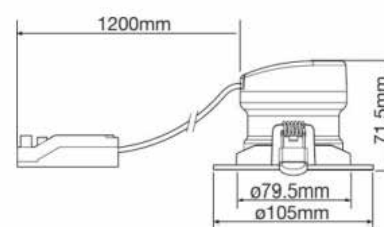

OSRO214835

OSRO132375

Note: Plug &amp; flex

## AREAS OF APPLICATION

- Residential and Commercial Indoor Accent lighting

## PRODUCT BENEFITS

- Adjustable swivel angle gimble +/- 30 deg
- Faceted reflector for focused 60deg beam angle
- Low Flicker integrated dimmable driver
- Easy to install - comes with flex and junction box/strain relief for easy push in terminal connection
- Flex and Plug version also available (1)

## PRODUCT FEATURES

Product Code	W	Lumen (Lm)	CCT	CRI	IP	IC Rating	Beam Angle	Lifetime (hrs)	Lm/W	Cutout (mm)	Dimmable	Material	Colour	Warranty
OSRO214873	7	630	3000	80	40	IC-4/F	60	30000	90	65	Yes	PC	White	5 years
OSRO214835	10	920	3000	80	40	IC-4/F	60	30000	92	79.5	Yes	PC	White	5 years
OSRO132375 (1)	10	920	3000	80	40	IC-4/F	60	30000	92	79.5	Yes	PC	White	5 years

# INTEGRATED LED DOWNLIGHTS

## DOWNLIGHT ALU



## AREAS OF APPLICATION

- Downlight for commercial applications
- General illumination
- Public areas
- Stairways
- Corridors
- Foyers
- Shops

## PRODUCT BENEFITS


- Easy installation with fast connect
- Homogenous light
- High efficacy
- External flicker free driver (compatible with selected DALI Dimming Drivers)

## PRODUCT FEATURES

Product Code	W	Lumen (Lm)	CCT	CRI	IP	Beam Angle	Lifetime (hrs)	Lm/W	Cutout (mm)	Material	Colour	Warranty
OSRO091511	25	2370	4000	80	44	100	50000 L70/ B50	95	200	PMMA	White	5 years
OSRO091573	35	3150	4000	80	44	100	50000 L70/ B50	90	200	PMMA	White	5 years

# INTEGRATED LED DOWNLIGHTS

## DOWNLIGHT ALU SLIM

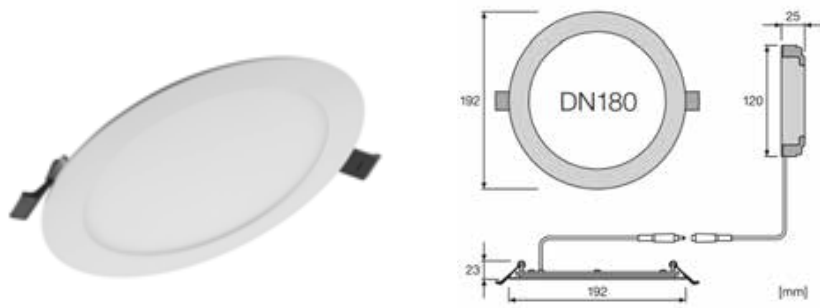

## AREAS OF APPLICATION

- Downlight for commercial applications
- General illumination
- Public areas
- Stairways
- Corridors
- Foyers
- Shops

## PRODUCT BENEFITS

- Slim Design 23mm depth
- Easy installation with fast connect
- Homogenous light
- High efficacy
- External flicker free driver (compatible with selected DALI Dimming Drivers)


## PRODUCT FEATURES

Product Code	W	Lumen (Lm)	CCT	CRI	IP	Beam Angle	Lifetime (hrs)	Lm/W	Cutout (mm)	Material	Colour	Warranty
OSRO063945	17	1400	4000	80	44	100	50000 L70/ B50	80	180	PMMA	White	5 years




# TRACK SPOT LIGHTS


## TRACK SPOT LIGHTS

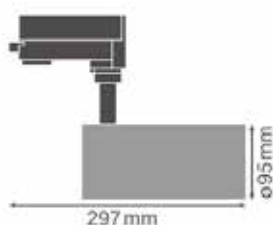

**OSRO113541**  
**OSRO113664**

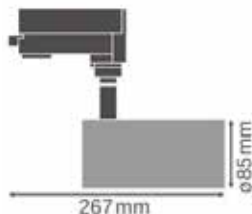

**OSRO113503**



**OSRO113466**

## AREAS OF APPLICATION

- Direct LED replacement for traditional track lighting luminaires
- Accent lighting
- Fashion shops, retail, high end residential

## PRODUCT BENEFITS

- High CRI >90 tracklight spot Ra9: > 50
- SDCM <3
- Included 3-phase adapter compatible with common 3 circuit universal track
- Rotation angle 350deg, tilt angle 90deg
- Deep reflector and black antiglare ring for minimized glare (UGR < 16)
- Low flicker integrated electronic driver
- Interchangeable Reflector Cones 15, 24, 38 deg

## PRODUCT FEATURES

Product Code	W	Lumen (Lm)	CCT	CRI	IP	Beam Angle	Lifetime (hrs)	Lm/W	Material	Colour	Warranty
OSRO113466	25	1900	4000	90	20	24	50000 L70/B50	75	PMMA	White	5 years
OSRO113503	35	2800	4000	90	20	24	50000 L70/B50	80	PMMA	White	5 years
OSRO113541	55	4200	4000	90	20	24	50000 L70/B50	75	PMMA	White	5 years
OSRO113664	55	4200	4000	90	20	24	50000 L70/B50	75	PMMA	Black	5 years

# LED BATTENS

## SLIM BATTEN POWER SWITCH TRI COLOUR



L 1450 x H 65 x D 65

**OSRO358607**

L 1135 x H 65 x D 65


**OSRO358584**L 600 x H 65 x D 65 **OSRO358560**

## AREAS OF APPLICATION

- Indoor batten applications
- General indoor illumination
- Corridors, entrance areas, stairwells, garages, schools, office

## PRODUCT BENEFITS

- Adjustable 3CCT colour temperature for a wide range of applications
- Power saving with step dim control via power select switch 100%/50%
- Ease of installation
- Classical timeless design




## PRODUCT FEATURES (3 SIZES)

Product Code	W	Lumen (Lm)	CCT	CRI	IP	Length (mm)	Beam Angle	Lifetime (hrs)	Lm/W	Dimmable	Material	Colour	Warranty
OSRO358560	20/10	1800 / 900	3000 4000 5700	80	20	600	120	30000	90	No	SPCC	White	5 years
OSRO358584	40/20	3600 / 1800	3000 4000 5700	80	20	1200	120	30000	90	No	SPCC	White	5 years
OSRO358607	50/25	4500 / 2250	3000 4000 5700	80	20	1500	120	30000	90	No	SPCC	White	5 years

# LED BATTENS

## PENDANT DIRECT OR DIRECT INDIRECT

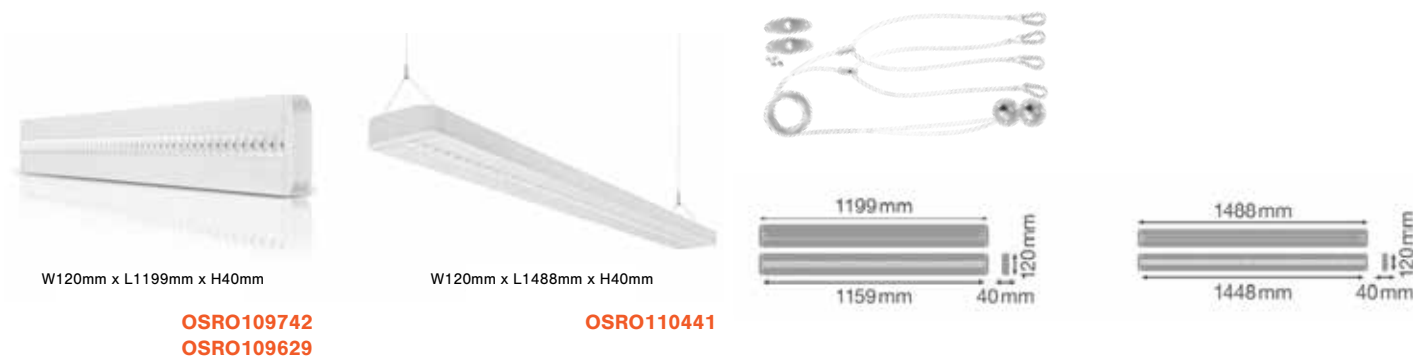

## AREAS OF APPLICATION

- Direct replacement for luminaires with fluorescent lamps
- Offices, schools, retail
- General indoor illumination
- Corridors, entrance areas
- Seamless linear low glare lighting
- Shop lighting

## PRODUCT BENEFITS

- Homogenous light distribution and reduced glare thanks to the IndiviLED® optics <UGR16
- Increased light comfort thanks to direct and indirect light distribution
- The product family offers full lighting solution for different applications
- Energy savings of up to 50 % compared to T5 batten luminaires
- Robust structure with IK06

## PRODUCT FEATURES

Product Code	W	Lumen (Lm)	CCT	CRI	IP	Length (mm)	Beam Angle	Lifetime (hrs)	Lm/W	Dimmable	Material	Colour	Warranty
OSRO109629 (Direct)	34	4080	4000	80	20	1200	70	60000 L70 / B50	120	No	ALU PC	White	5 years
OSRO109742 (Direct / Indirect)	42	5040	4000	80	20	1200	70	60000 L70 / B50	120	No	ALU PC	White	5 years
OSRO110441 (Direct / Indirect)	56	6550	4000	80	20	1200	70	60000 L70 / B50	120	No	ALU PC	White	5 years

Product Code	Description
OSRO133280	Suspension Kit

# PANELS

## PANEL VALUE (50K HRS)



W295mm x L595mm x D64mm

**OSRO003378**  
**OSRO330573**



W595mm x L595mm x D64mm

**OSRO330658**  
**OSRO330634**



W295mm x L1195mm x D64mm

**OSRO330696**

W595mm x L1195mm x D64mm

**OSRO379138**

## AREAS OF APPLICATION

- Hospitals
- Office areas
- Public areas
- Retail
- Schools

## PRODUCT BENEFITS

- Easy and quick connection thanks to simple plug system if replacing standard driver with DALI dimming driver
- Elegant design and homogeneous and uniform light output
- External Low flicker Driver

## PRODUCT FEATURES

Product Code	Size (mm)	W	Lumen (Lm)	CCT	CRI	IP	Beam Angle	Lifetime (hrs)	Lm/W	Dimmable	Material	Colour	Warranty
OSRO330573	300x600	20	1800	4000	80	20	120	50000 L70/B50	90	No	ALU PC	White	5 years
OSRO003378	300x600	17	1600	6500	80	20	120	50000 L70/B50	95	No	ALU PC	White	5 years
OSRO330696	300x1200	36	3200	4000	80	20	120	50000 L70/B50	90	No	ALU PC	White	5 years
OSRO330634	600x600	36	3200	4000	80	20	120	50000 L70/B50	90	No	ALU PC	White	5 years
OSRO330658	600x600	36	3200	6500	80	20	120	50000 L70/B50	90	No	ALU PC	White	5 years
OSRO379138	600x1200	60	5800	4000	80	20	120	50000 L70/B50	90	No	ALU PC	White	5 years

# PANELS

## PANEL HIGH OUTPUT 120lm/W (60HRS)



36W  
595mm x 595mm

**OSRO505483**



50W  
595mm x 1195mm

**OSRO505568**



36W  
295mm x 1195mm

**OSRO505520**

## AREAS OF APPLICATION

- Hospitals
- Office areas
- Public areas
- Retail
- School

## PRODUCT BENEFITS

- High Output / High Efficacy
- Low glare UGR<19 light output
- Easy and quick connection thanks to simple plug system if replacing standard driver with DALI dimming driver
- Elegant design and homogeneous and uniform light output
- External Low flicker Driver

## PRODUCT FEATURES

Product Code	Size (mm)	W	Lumen (Lm)	CCT	CRI	IP	Beam Angle	Lifetime (hrs)	Lm/W	Dimmable	Material	Colour	Warranty
OSRO505520	300 x 1200	36	4320	4000	80	20	120	60000L70 / B50	120	No	ALU PC	White	5 years
OSRO505483	600 x 600	36	4320	4000	80	20	120	60000L70 / B50	120	No	ALU PC	White	5 years
OSRO505568	600 x 1200	50	6000	4000	80	20	120	60000L70 / B50	120	No	ALU PC	White	5 years

# PANELS

## TRI COLOUR (50K HRS)



36W  
595mm x 595mm

**OSRO491595**



50W  
595mm x 1195mm

**OSRO491779**



36W  
295mm x 1195mm

**OSRO277090**

## AREAS OF APPLICATION

- Hospitals
- Office areas
- Public areas
- Retail
- Schools

## PRODUCT BENEFITS

- 3CCT color select 3000K/4000K/6500K
- Easy and quick connection thanks to simple plug system
- Elegant design and homogeneous and uniform light output
- External Low flicker Driver with flex and plug

## PRODUCT FEATURES (3 SIZES)

Product Code	Size (mm)	W	Lumen (Lm)	CCT	CRI	IP	Beam Angle	Lifetime (hrs)	Lm/W	Dimmable	Material	Colour	Warranty
OSRO277090	300 x 1200	32	3200	3000 4000 6500	80	20	120	50000 L70/ B50	120	No	ALU PC	White	5 years
OSRO491595	600 x 600	36	3900	3000 4000 6500	80	20	120	50000 L70/ B50	120	No	ALU PC	White	5 years
OSRO491779	600 x 1200	50	6600	3000 4000 6500	80	20	120	50000 L70/ B50	120	No	ALU PC	White	5 years

# PANELS

## INDIVILED (80K HRS) Indent only



**OSRO414303**

W595mm x L595mm x D12mm



**OSRO414365**

W295mm x L1295mm x D12mm

## AREAS OF APPLICATION

- Direct replacement for luminaires with fluorescent lamps
- Corridors
- Offices
- Conference rooms
- Reception areas
- Foyers
- Elevators

## PRODUCT BENEFITS

- 70 deg light distribution and reduced glare thanks to the IndiviLED® optics UGR 19
- High Output / High Efficacy
- Easy and quick connection thanks to simple plug system if replacing standard driver with DALI dimming driver
- Extremely long lifetime 80,000 hrs
- SDCM <5

## PRODUCT FEATURES (2 SIZES)

Product Code	Size (mm)	W	Lumen (Lm)	CCT	CRI	IP	Beam Angle	Lifetime (hrs)	Lm/W	Dimmable	Material	Colour	Warranty
OSRO414365	300 x 1200	33	4000	4000	80	20	70	80000 L70/B50	120	No	ALU PC	White	5 years
OSRO414303	600 x 600	33	4000	4000	80	20	70	80000 L70/B50	120	No	ALU PC	White	5 years

# PANELS ACCESSORIES



## PANEL ACCESSORIES

Product Code	Size (mm)	Description	Colour
OSRO426450	300 x 600	Surface Mount Kit	White
OSRO426498	300 x 1200	Surface Mount Kit	White
OSRO426474	600 x 600	Surface Mount Kit	White
OSRO426511	600 x 1200	Surface Mount Kit	White
OSRO426535	300 x 1200	Recessed Mount Frame	White
OSRO426597	600 x 600	Recessed Mount Frame	White
OSRO426597	600 x 1200	Recessed Mount Frame	White
OSRO003392	Suspension Kit 1 KIT=2 WIRES // 600x600 PANEL REQ 2 WIRES // 600x1200 PANEL REQ 3 WIRES		N/A



# CEILING OYSTER

## STANDARD



## AREAS OF APPLICATION

- Corridors / Living Area
- Entrance / Hallways
- Residential

## PRODUCT BENEFITS

- Uniform room illumination
- Luminous Efficacy: 80 lm/W
- Lifetime up to 30,000hr
- 3yr Warranty

## PRODUCT FEATURES

Product Code	Diameter Size (mm)	W	Lumen (Lm)	CCT	CRI	IP	Beam Angle	Lifetime (hrs)	Lm/W	Dimmable	Material	Colour	Warranty
OSRO802360	350	23	1850	3000	80	20	120	30000 L70/ B50	80	No	ALU PC	White	5 years

# CEILING OYSTER

## TRI COLOUR



## AREAS OF APPLICATION

- Corridors / Living Areas
- Entrance / Hallways
- Residential/Commercial

## PRODUCT BENEFITS

- Uniform room illumination
- Tri-Colour slide switch: 3000K, 4000K, 5000K
- Easy install - mounts directly to ceiling through base plate
- Simple Classical Design
- Integrated dimmer flicker free

## PRODUCT FEATURES (4 SIZES)

Product Code	Size (mm)	W	Lumen (Lm)	CCT	CRI	IP	Beam Angle	Lifetime (hrs)	Lm/W	Dimmable	Material	Colour	Warranty
OSRO207509	250	13	1235	3000 4000 5000	80	20	120	30000 L70/ B50	80	No	Metal PC	White	5 years
OSRO207523	300	15	1425	3000 4000 5000	80	20	120	30000 L70/ B50	80	No	Metal PC	White	5 years
OSRO207547	350	18	1620	3000 4000 5000	80	20	120	30000 L70/ B50	80	No	Metal PC	White	5 years
OSRO207561	400	24	2160	3000 4000 5000	80	20	120	30000 L70/ B50	80	No	Metal PC	White	5 years

# BULKHEAD

## BULKHEAD IK10



D350mm  
OSRO391918  
OSRO391970



D300mm  
OSRO062207  
OSRO062221

## AREAS OF APPLICATION

– High Quality Bulkhead/Oyster for commercial and residential applications and outdoor areas including building facades, corridors, balconies

## PRODUCT BENEFITS

- Robust: IK10
- Housing made of durable polycarbonate
- Type of protection: IP65
- Emergency and Micro Sensor model available (1)

## PRODUCT FEATURES

Product Code	Diameter Size (mm)	W	Lumen (Lm)	CCT	CRI	IP	Beam Angle	Lifetime (hrs)	Lm/W	Dimmable	Material	Colour	Warranty
OSRO391918	350	19	1615	4000	80	65	120	30000 L70/B50	85	No	PC	Black	5 years
OSRO391970 (1)	350	21	1785	4000	80	65	120	30000 L70/B50	85	No	PC	Black	5 years
OSRO062207	300	24	1800	3000	80	65	120	30000 L70/B50	75	No	PC	White	5 years
OSRO062221	300	24	1800	4000	80	65	120	30000 L70/B50	75	No	PC	White	5 years

# FLOODLIGHT

## STANDARD



10W  
L131 x W121 x H35.7



20W  
L155.8 x W144.3 x H41.7



30W  
L186 x W177 x H42



50W  
L218 x W205 x H46

## AREAS OF APPLICATION

- Architecture and landscape lighting
- Industrial warehouses lighting
- Billboard and advertising lighting
- Security, amenity and parking area lighting

## PRODUCT BENEFITS

- IP safe high efficiency LEDs ensure system liability and legal risks free
- Aluminum heat sink
- Premium grade polycarbonate front frame to reduce overall product weight
- Elegant slim design reduces windage
- Tempered frosted front glass to increase uniformity
- IK07 impact resistant

## PRODUCT FEATURES

Product Code	W	Lumen (Lm)	CCT	CRI	IP	Beam Angle	Lifetime (hrs)	Lm/W	Dimmable	Material	Colour	Warranty
OSRO214507	10	800	6500	80	65	100	50000 L70/B50	80	No	Die-Cast	Black	5 years
OSRO214521	10	800	3000	80	65	100	50000 L70/B50	80	No	Die-Cast	Black	5 years
OSRO476431	20	2400	6500	80	65	100	50000 L70/B50	120	No	Die-Cast	Black	5 years
OSRO214583	30	2700	6500	80	65	100	50000 L70/B50	90	No	Die-Cast	Black	5 years
OSRO476554	50	6000	6500	80	65	100	50000 L70/B50	120	No	Die-Cast	Black	5 years
OSRO024823	50	6000	4000	80	65	100	50000 L70/B50	120	No	Die-Cast	Black	5 years
OSRO476516	50	5500	3000	80	65	100	50000 L70/B50	110	No	Die-Cast	Black	5 years

# FLOODLIGHT

## PRO DIE-CAST ALUMINUM



65W  
L237 x W268 x H49



70W  
L260 x W335 x H55



100W  
L290 x W381 x H59



165W  
L418 x W322 x H60



180W  
L354 x W454 x H62

## AREAS OF APPLICATION

- Architecture and landscape lighting
- Industrial warehouses lighting
- Billboard and advertising lighting
- Security, amenity and parking area lighting
- Spots lighting

## PRODUCT BENEFITS

- SMD LED design to maximize product reliability
- One-piece compact high grade die-cast aluminum housing and heat sink
- Tempered frosted front glass to increase uniformity
- IK08 vandal-protected

## PRODUCT FEATURES

Product Code	W	Lumen (Lm)	CCT	CRI	IP	Beam Angle	Lifetime (hrs)	Lm/W	Dimmable	Material	Colour	Warranty
OSRO476578	65	7150	3000	80	65	100	50000 L70/B50	110	No	Die-Cast	Black	5 years
OSRO024847	70	6300	4000	80	65	100	50000 L70/B50	90	No	Die-Cast	Black	5 years
OSRO214668	70	6300	6500	80	65	100	50000 L70/B50	90	No	Die-Cast	Black	5 years
OSRO003675	100	9000	3000	80	65	100	50000 L70/B50	90	No	Die-Cast	Black	5 years
OSRO214682	100	9000	6500	80	65	100	50000 L70/B50	90	No	Die-Cast	Black	5 years
OSRO024861	150	13500	4000	80	65	100	50000 L70/B50	90	No	Die-Cast	Black	5 years
OSRO069718	150	13500	6500	80	65	100	50000 L70/B50	90	No	Die-Cast	Black	5 years
OSRO476752	165	18150	3000	80	65	100	50000 L70/B50	110	No	Die-Cast	Black	5 years
OSRO476776	165	20000	4000	80	65	100	50000 L70/B50	121	No	Die-Cast	Black	5 years
OSRO476790	165	20000	6500	80	65	100	50000 L70/B50	121	No	Die-Cast	Black	5 years
OSRO097728	180	20000	4000	80	65	100	50000 L70/B50	111	No	Die-Cast	Black	5 years

# WEATHER PROOF BATTEN

## STANDARD



Code	Length (mm)	Width (mm)	Height (mm)
<b>OSRO079939</b>	1500	95	78
<b>OSRO003484</b>	1270	118	80
<b>OSRO806245</b>	1270	118	80
<b>OSRO003460</b>	1270	85	80

## AREAS OF APPLICATION

- Industrial and storage facilities
- Car parks and underpasses
- Garages
- Workshops, assembly lines
- Retail Shop Under-Veranadahs

## PRODUCT BENEFITS

- 304 Stainless Steel Clips
- Ambient temp range -30 to +40 deg
- IK08 Impact resistant due to robust prismatic UV stabilized polycarbonate body
- SDCM<5

## PRODUCT FEATURES

Product Code	W	Lumen (Lm)	CCT	CRI	IP	Length (mm)	Beam Angle	Lifetime (hrs)	Lm/W	Dimmable	Material	Colour	Warranty
OSRO003460	20	2000	6500	80	65	1200	120	30000 L70/B50	100	No	PC	Grey	5 years
OSRO806245	40	4000	4000	80	65	1200	120	30000 L70/B50	100	No	PC	Grey	5 years
OSRO003484	40	4000	6500	80	65	1200	120	30000 L70/B50	100	No	PC	Grey	5 years
OSRO079939	30	3500	4000	80	65	1200	105	50000 L70/B50	115	No	PC	Grey	5 years

# WEATHER PROOF BATTEN 3CCT

## CLASSIC WEATHRPROOF BATTEN (POWERSWITCH, TRI COLOUR) 96mm wide



L1500mm x H96mm x D79mm



L1200mm x H96mm x D79mm

## AREAS OF APPLICATION

- Car parks and underpasses
- Garages
- Industrial and storage facilities
- Workshops, assembly lines
- Retail Shop Under-Verandahs

## PRODUCT BENEFITS

- 304 Stainless Steel Clips
- 3CCT color select 3000, 4000, 6500K
- Power/Lumen select 100% or 50% light output
- High-power LED for high light output 120lm/W
- Emergency version available (1)
- Lifetime up to 50,000hr
- 5yr Warranty

## PRODUCT FEATURES

Product Code	W	Lumen (Lm)	CCT	CRI	IP	Length (mm)	Beam Angle	Lifetime (hrs)	Lm/W	Dimmable	Material	Colour	Warranty
OSRO393547	40	4800/2400	3000 4000 6500	80	65	1200	115	50000 L70 / B50	120	No	PC	Grey	5 years
OSRO403734 (1)	42	4800/2400	3000 4000 6500	80	65	1200	115	50000 L70 / B50	120	No	PC	Grey	5 years
OSRO393578	50	6000/3000	3000 4000 6500	80	65	1500	115	50000 L70 / B50	120	No	PC	Grey	5 years

# WEATHER PROOF BATTEN WIDE

## WIDE 130MM



5FT: L1500mm x H92mm x D130mm



4FT: L1200mm x H92mm x D130mm

## AREAS OF APPLICATION

- Car parks and underpasses
- Garages
- Industrial and storage facilities
- Workshops, assembly lines
- Retail Shop Under-Verandahs

## PRODUCT BENEFITS

- 304 Stainless Steel Clips
- Ambient temp range -20 to +40 deg
- IK08 Impact resistant due to robust prismatic UV stabilized polycarbonate body
- SDCM<5
- Emergency model available\*

## PRODUCT FEATURES

Product Code	W	Lumen (Lm)	CCT	CRI	IP	Length (mm)	Beam Angle	Lifetime (hrs)	Lm/W	Dimmable	Material	Colour	Warranty
OSRO396586*	42	4000	4000	80	65	1200	115	50000 L70/B50	100	No	PC	Grey	5 years
OSRO394889	50	5000	4000	80	65	1500	115	50000 L70/B50	100	No	PC	Grey	5 years



# HIGHBAY

## HIGH BAY PRO



150W  
D321mm x H107.2mm



200W  
D321mm x H121.3mm

## AREAS OF APPLICATION

- Industrial and storage facilities
- Production and assembly facilities
- Factories
- Supermarkets

## PRODUCT BENEFITS

High efficiency and reliability 140lm/W

- 1.5m Flex and Plug
- 1-10V Dimming capability
- Micro sensor for proximity detection and remote control accessories available
- Mounting Bracket available
- Equipment for suspended and pole mounting included
- IK08 impact resistant with die-cast aluminum body enabling high efficacy heat dissipation
- Operating temperature -30 to +50deg

## PRODUCT FEATURES

Product Code	W	Lumen (Lm)	CCT	CRI	IP	Weight	Beam Angle	Lifetime (hrs)	Lm/W	Dimmable	Material	Colour	Warranty
OSRO464667	150	21000	4000	80	65	2300	90	50000 L70/B50	140	Yes	ALU	Black	5 years
OSRO464629	150	21000	6500	80	65	2300	90	50000 L70/B50	140	Yes	ALU	Black	5 years
OSRO464674	200	28000	4000	80	65	2900	70	50000 L70/B50	140	Yes	ALU	Black	5 years
OSRO464636	200	28000	6500	80	65	2900	70	50000 L70/B50	140	Yes	ALU	Black	5 years
OSRO464728	Micro Sensor												
OSRO464742	Remote Control												
OSRO443136	Bracket 150W												
OSRO443150	Bracket 200W												

# LED STRIP

## STRIP KITS



## AREAS OF APPLICATION

- Cove Lighting
- Back Lighting
- Shelf and Cupboard Lighting

## PRODUCT BENEFITS

- Easy to plan
- Easy to combine
- Easy to install
- Cuttable lengths 83mm
- 3M self-adhesive strip
- 5m lengths on reel with power supply flex and plug
- Operating temperature -10 to +45 deg
- SDCM <5

## PRODUCT FEATURES

Product Code	W	Lumen (Lm)	CCT	CRI	IP	LxWxH (mm)	Beam Angle	Lifetime (hrs)	Lm/W	Dimmable	Material	Colour	Warranty
OSRO033436	20	280	3000	80	44	5000x83x2.5	120	20000 L70/B50	14	No	ALU	Black	5 years
OSRO033450	20	280	4000	80	44	5000x83x2.5	120	20000 L70/B50	14	No	ALU	Black	5 years
OSRO033559	20	280	6500	80	44	5000x83x2.5	120	20000 L70/B50	14	No	ALU	Black	5 years

# MOTION SENSORS

## PIR WALL MOUNTED



**OSRO373037**

W65.5mm x H83mm



**OSRO373051**

W86.5mm x H155.5mm

## AREAS OF APPLICATION

- Suitable for indoor and sheltered outdoor areas (IP44)

## PRODUCT BENEFITS

- High Ingress Protection (IP44)
- 180 degree Motion sensor with passive IR detector
- Easily adjustable sensitivity, timer function, ambient luminance level settings via rotary dials
- Photocell for daylight detection to switch on at dusk and off at dawn

## PRODUCT FEATURES

Product Code	Sensor Tech	Mounting	Detection Area	Max Reach (m)	IP	Adj (deg)	Delay Time	Rated Load (GLS/LED)	Mounting Height (m)	Light Level Setting	Setting	Colour	Warranty
OSRO373037	PIR+PE	Wall / Ceiling	180°	12	44	180°	10sec - 7m	1200/300	1.8 - 2.5	10 - 2000	Dial	White	5 years
OSRO373051	PIR+PE	Wall / Ceiling	180°	12(adj)	44	180°	10sec - 7m	1200/300	1.8 - 2.5	10 - 2000	Dial	White	5 years

# MOTION SENSORS

## PIR CEILING RECESSED



**OSRO383258**

W61.5mm x H76mm



**OSRO373013**

W80mm x H62mm

## AREAS OF APPLICATION

- Suitable for indoor (IP20)

## PRODUCT BENEFITS


- 360 degree Motion sensor with passive IR detector
- Easily adjustable timer function, ambient luminance level settings via rotary dials
- Photocell for daylight detection to switch on at dusk and off at dawn

## PRODUCT FEATURES

Product Code	Sensor Tech	Mounting	Detection Area	Max Reach (m)	IP	Delay Time	Rated Load (GLS/LED)	Mounting Height (m)	Light Level Setting	Setting	Colour	Warranty
OSRO373013	PIR+PE	Recessed Ceiling	360°	8	20	10sec - 15m	1200/300	4	3 - 2000	Dial	White	5 years
OSRO383258	PIR+PE	Recessed Ceiling	360°	6	20	10sec - 15m	1200/300	4	10 - 2000	Dial	White	5 years

# MOTION SENSORS

## PIR SURFACE

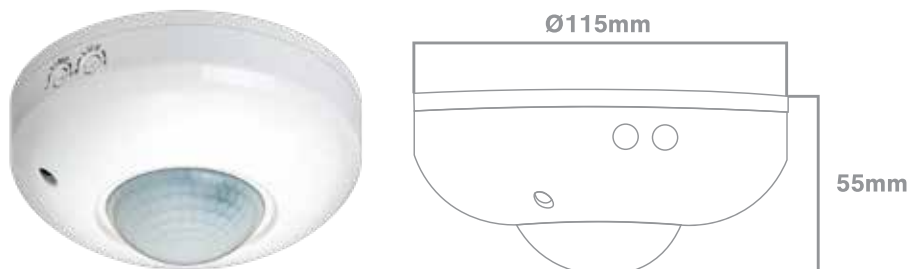

## AREAS OF APPLICATION

- Suitable for indoor applications
- Offices
- Corridors
- Stairways
- Residential interiors
- Commercial buildings

## PRODUCT BENEFITS


- 360 degree Motion sensor with passive IR detector
- Easily adjustable timer function, ambient luminance level settings via rotary dials
- Photocell for daylight detection to switch on at dusk and off at dawn

## PRODUCT FEATURES

Product Code	Sensor Tech	Mounting	Detection Area	Max Reach (m)	IP	Delay Time	Rated Load (GLS/LED)	Mounting Height (m)	Light Level Setting	Setting	Colour	Warranty
OSRO372955	PIR+PE	Surface Ceiling	360°	6	20	10sec - 7m	1200/300	4	10 - 2000	Dial	White	5 years

# EMERGENCY LIGHTING

## EMERGENCY EXIT

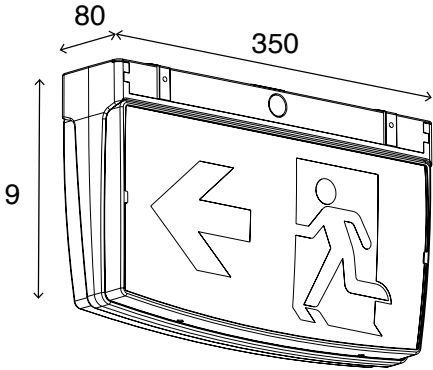

## DESCRIPTION


Value running man exit sign with 6 interchangeable PVC legends is easy to install thanks to screw terminal. LEDVANCE Exit Sign is a classic, surface mounted, double sided design. With a maintained lithium battery and a discharge time of up to 3 hours. Indoor application only IP20 and 24m viewing distance.

## PRODUCT FEATURES

Product Code	Lumen (Lm)	W	CCT (k)	Distance (m)	IP	Class	Battery	Charging Time (hrs)	Discharging Time (hrs)	Terminal Block	Colour	Warranty
OSRO443303	50	3	6500	12	20	Maintained	LiFeP04	24/16	3/2	Screw	White	5 years

# EMERGENCY LIGHTING

## 5 in 1 EXIT SIGN

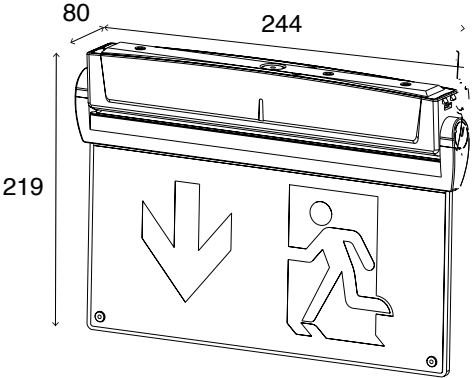

### DESCRIPTION


Thanks to 3 different mounting brackets and its double-sided edge lit acrylic face, this LEDVANCE 5 in 1 exit sign will suit any of your application needs with a quick and simple installation thanks to screw terminal. This stylish and versatile exit sign comes complete with 7 interchangeable PVC legends. Choose from surface suspending, side mounting or recessing, with a maintained lithium battery and a discharge time of up to 3 hours. Indoor application only IP20 and 24m viewing distance brackets included).

### PRODUCT FEATURES

Product Code	Lumen (Lm)	W	CCT (k)	Distance (m)	IP	Class	Battery	Charging Time (hrs)	Discharging Time (hrs)	Terminal Block	Colour	Warranty
OSRO443327	30	2	6500	24	20	Maintained	LiFeP04	24/16	3/2	Screw	White	5 years

# EMERGENCY LIGHTING

## EXIT BLADE

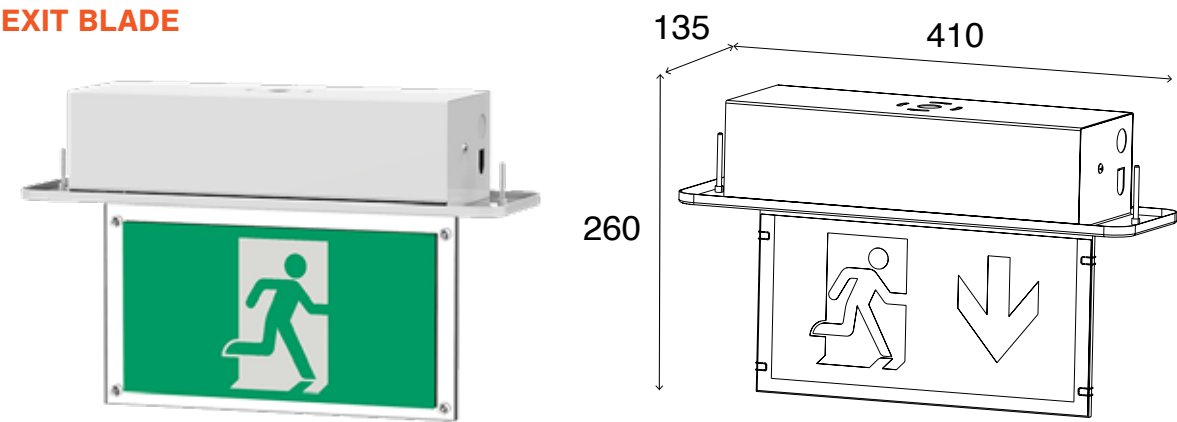

## DESCRIPTION

Thanks to 3 different mounting brackets and its double-sided edge lit acrylic face, this LEDVANCE 5 in 1 exit sign will suit any of your application needs with a quick and simple installation thanks to screw terminal. This stylish and versatile exit sign comes complete with 7 interchangeable PVC legends. Choose from surface suspending, side mounting or recessing, with a maintained lithium battery and a discharge time of up to 3 hours. Indoor application only IP20 and 24m viewing distance brackets included).


## PRODUCT FEATURES

Product Code	Lumen (Lm)	W	CCT (k)	Distance (m)	IP	Class	Battery	Charging Time (hrs)	Discharging Time (hrs)	Terminal Block	Colour	Warranty
OSRO443341	35	2	6500	24	20	Maintained	LiFeP04	24/16	3/2	Screw	White	5 years



# EMERGENCY LIGHTING

## EX-BOX

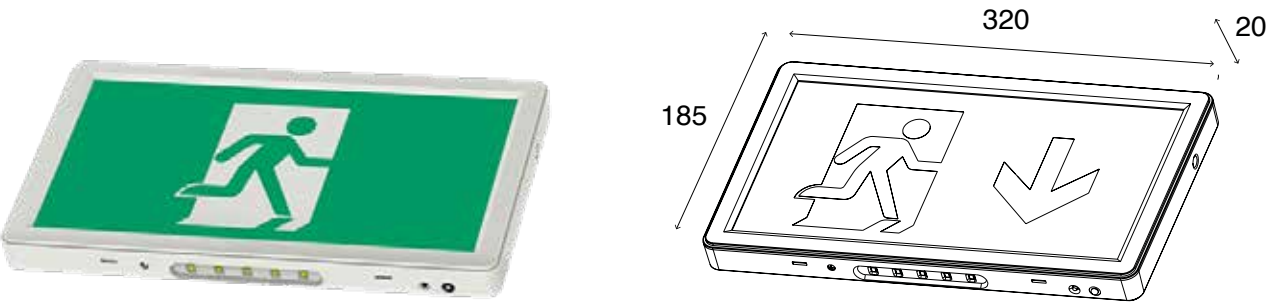

## DESCRIPTION

High performance LEDVANCE EX-BOX is a single sided, running man exit sign, complete with 4 PVC interchangeable legends. This stylish yet convenient emergency light also has extra security as it is designed with 5 SMD chips on the base for illumination of the exit door. Indoor application only IP20 and 24m viewing distance.

## PRODUCT FEATURES

Product Code	Lumen (Lm)	W	CCT (k)	Distance (m)	IP	Class	Battery	Charging Time (hrs)	Discharging Time (hrs)	Terminal Block	Colour	Warranty
OSRO443488	35	2	6500	24	20	Maintained	LiFeP04	24/16	3/2	Screw	White	5 years

# EMERGENCY LIGHTING

## EMERGENCY SPITFIRE



### DESCRIPTION


Recessed Firelight luminaire provides high visibility whilst remaining discreet and aesthetically pleasing. This non-maintained fitting comes complete with 1.5m flex and plug for a quick and easy installation. Choose from a wide area and corridor mode lenses to suit your application needs. Indoor application only IP20 and IC4 and IP65 version for outdoor application.

### PRODUCT FEATURES

Product Code	Lumen (Lm)	W	CCT (k)	IP	Class	Battery	Charging Time (hrs)	Discharging Time (hrs)	Terminal Block	Colour	Warranty
OSRO443365	240	3	6500	20	Non- Maintained D40/C0: D40	LiFeP04	24/16	3/2	Pre-wired	White	5 years
OSRO443525	240	2.5	6500	65	Non- Maintained D40/C0: D40	LiFeP04	24/16	3/2	Pre-wired	White	5 years

# EMERGENCY LIGHTING

## EMERGENCY TWIN SPOT

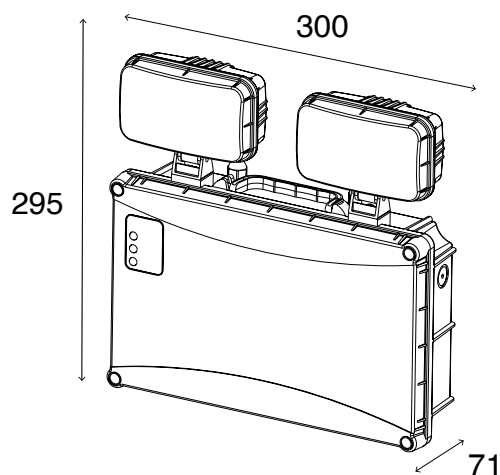

## DESCRIPTION

LEDVANCE Twin Security Spot is a non-maintained, surface mounted emergency luminaire with a high ingress protection rating of IP65, suitable for both indoor and outdoor applications. The adjustable Twin Spot is designed with a large screw terminal block for a quick and easy installation

## PRODUCT FEATURES

Product Code	Lumen (Lm)	W	CCT (k)	IP	Class	Battery	Charging Time (hrs)	Discharging Time (hrs)	Terminal Block	Colour	Warranty
OSRO443402	240	1	6500	65	Non- Maintained	LiFeP04	24/16	3/2	Screw	White	5 years

## ABOUT LEDVANCE

With offices in more than 50 countries and business activities in more than 140 countries, LEDVANCE is one of the world's leading general lighting providers for professional users and end consumers. Having emerged from the general lighting business of OSRAM GmbH, LEDVANCE offers a wide-ranging assortment of LED luminaires for a broad spectrum of application areas, intelligent lighting products for Smart Homes and Buildings, one of the largest LED lamps portfolios in the industry as well as traditional light sources.



4-8 Mainstreet Place  
Te Rapa, Hamilton , NZ 3200  
[www.electrical.co.nz](http://www.electrical.co.nz)

[sales@electrical.co.nz](mailto:sales@electrical.co.nz)  
+64 7 849 9119  
0800 350 000

Name:

Contact: