



Terra AC Wallbox

22kW 3 Phase 32A Socket Type 2 RFID 4G

ESC Code: 6AGC082153




THE HOME OF CHARGING

Terra AC Wallbox

ABB is trusted by the world's biggest brands to provide smarter mobility solutions from highway to home. The Terra AC wallbox combines ABB's leadership in e-mobility and 130-year heritage of innovation in a superior wall charging solution.

ESC CODE: 6AGC082153

Description: ABB Terra AC EV Charger 22kW 3ph 32A Socket Type 2 RFID 4G

Output Power	AC 22kW
Number of Socket Outlets	(AC type 2) 1 piece
Output Voltage (U_{out})	380...415 VAC
Output Current	3 Phase 32A
Connection Power	Nominal 22.5kW
Supply Voltage	AC 380...415V
Input Current	3 Phase 32A
Operating Frequency (f_{sw})	50...60 Hz
Number of Phases	3
Overload Protection	Overcurrent protection at 40A
Ambient Air Temperature	Operation -30 ... +50°C Operation -50 ... +80°C
Communication Interface	Wifi / Bluetooth / 4G
Authentication Method	RFID
Enclosure Type	Indoor / Outdoor
Mounting Type	Wall Mounting
Number of RCDs Electric Vehicle Supply Equipment	Type A 1
Compliant with Standards	IEC, UL, CE
Dimensions Charging cable are purchased separately - See back page for accessories	 <p>A = 320mm B = 195mm C = 110mm Net Weight: 2.5kg</p>

130

Brought to you by the global experts in smart mobility, smart buildings and smart homes, the Terra AC wallbox is built on ABB's **130-year heritage** of accessible technology leadership for safe, smart and sustainable electrification and informed by our comprehensive expertise in e-mobility.

TERRA AC WALLBOX

Technical features

Protection

- Built-in DC leakage current detection
- No requirement for a type B RCD

Design

- IEC variants:
 - Three phase up to 22kW / 32 A
- Impact Rating IK10
- IP Rating IP54

Built-in safety


- Overcurrent
- Overvoltage and undervoltage
- Ground fault
- Surge protection
- PE (protective earth) continuity monitoring

Connectivity

- Ethernet RJ45
- Bluetooth
- Wifi
- 4G enabled
- Complete with Modbus RTU (RS485) Port
- Open Charge Point Protocol 1.6 Enabled (OCPP-1.6)
- Authentication via the App or RFID
- Configuration via the App or ABB web portal

Connectors

- Type 1 and type 2 cable
- Type 2 socket with or without shutter
- No need of extra hook, attached cable can be wrapped around the charger

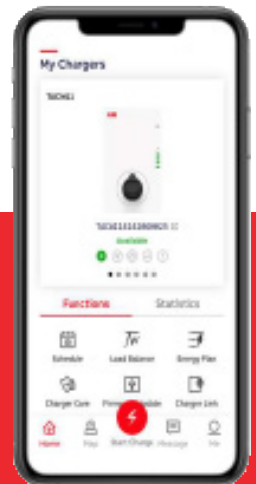

ChargerSync Smartphone App

- Authentication
- Energy plan
- Schedule
- Add and delete charger devices
- Load balancing (Adjust to static power limit)
- Status monitoring
- Troubleshoot
- Statistics
- Firmware upgrade



Product & Accessories

Terra AC



ESC CODE	DESCRIPTION
6AGC082587	ABB Terra AC EV Charger 3.7kw 1ph 16A
6AGC082155	ABB Terra AC EV Charger 7.4kw 1ph 32A
6AGC082153	ABB Terra AC EV Charger 22kW 3P 32A with RFID4G
EVL1P16AEVT2T2-5M	5 Meter EV Charging Cable 16A 1 Phase Type2 to Type2
EVL1P16AEVT2T2-8M	8 Meter EV Charging Cable 16A 1 Phase Type2 to Type2
EVL1P32AEVT2T1-8M	8 Meter EV Charging Cable 32A 1 Phase Type2 to Type1
EVL1P32AEVT2T2-5M	5 Meter EV Charging Cable 32A 1 Phase Type2 to Type2
EVL3P16AEVT2T2-8M	8 Meter EV Charging Cable 16A 3 Phase Type2 to Type2
EVL3P32AEVT2T2-5M	5 Meter EV Charging Cable 32A 3 Phase Type2 to Type2
EVL3P32AEVT2T2-8M	8 Meter EV Charging Cable 32A 3 Phase Type2 to Type2
EVL1P32AEVT2T2-8M	8 Meter EV Charging Cable 32A 1 Phase Type2 to Type2
EVPEDESTAL1	Single Pedestal for EV Charger
EVPEDESTAL2	Double Pedestal for EV Charger