



Metal Glands

TECHNICAL DATASHEET

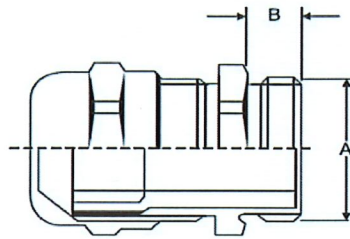

Plated Brass Gland - IP68 Rating - Metric Thread

- IP 68 rating the highest possible
- Superior strain relief
- Nickel plated brass for corrosion protection.
- Incorporates a unique camera shutter principle which protects the cable.
- Fully insulated by plastic insert.
- Neoprene seal for fluid tightness.



Specifications:

- Material: Brass nickel plated
- Polyamide 6 insert (self extinguishing)
- Neoprene seal (self extinguishing)
- Neoprene O-Ring (self extinguishing)
- Continuous operating temperature: -20 to + 100°C
- Chemical resistance: Resistant to normal organic solvents, mineral, animal and vegetable oils and fat, petrol
- Threading: According to IEC 423, EC 423A and EN 60423
- IP rating: IP68



Metal Glands

TECHNICAL DATASHEET

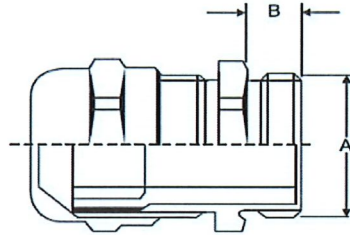

Plated Brass Gland - IP68 Rating - Metric Thread

Mounting Thread		Min.	Max.	Width	Product Code	Pack Code
A Dia. (mm)	B Leng. (mm)	Cab. Ran. (mm)	Cab. Ran. (mm)	A/F (mm)		
12	5	3	6	14	HIP68-12	40
16	5	5	10	17	HIP68-16	20
20	6	8	13	22	HIP68-20	20
25	7	11	17	27	HIP68-25	10
32	8	15	21	34	HIP68-32	5
40	8	19	28	43	HIP68-40	3
50	9	26	35	55	HIP68-50	1
63	10	32	42	65	HIP68-63	1