



Type:

Specification Notes:



*IP65 Recessed Downlight*

## FEATURES:


CODE	WATTS	BEAM ANGLE	DELIVERED LUMENS*	BODY COLOUR	OUTPUT CURRENT
EN103310W6D	10	60°	751	white	230 mA
EN103313W6D	13	60°	948	white	300 mA
EN103313B6D	13	60°	920	black	300 mA

## LIGHT QUALITY:

CCT:	3000K
CRI:	> 90
SCDM:	< 3
Lifetime:	40,000 hrs
Beam Angle:	60°
Light Emission:	Direct
Power Supply:	AC200-240V, 50/60Hz
Driver:	Fixed output

## PHYSICAL FEATURES:

IP Rating:	IP65
IK Rating:	N/A
Body:	ADC12 Aluminium, white
Diffuser:	Diamond faceted surface lens
Dimensions:	Ø110 x 65mm
Cutout:	Ø 90-95mm,
Weight:	0.45kg
Driver Position:	Remote

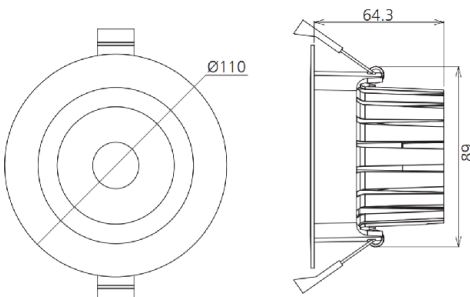

\* lumen output may vary by ±5%

## WARRANTIES:

Warranty: Five years