

CABLE TRUNKING




PRODUCT FEATURES

- Elmark PVC cable trunking is versatile and cost effective, which can be used in applications where cable protection is essential.
- The open slot construction also allows for cables to be routed into and out of the trunking at any point.
- The trunking is made from high impact, warp proof PVC, and is self-extinguishing to UL94-V0.
- All Elmark trunking additional features offers quick and easy snap score lines and firm grip lid design and meets all RHOS directives.

ESC CODES

ELTR2550GS	Trunking Open Slot 25 x 50 Grey 1.7 mtrs
ELTR2575GS	Trunking Open Slot 25 x 75 Grey 1.7 mtrs
ELTR5050GS	Trunking Open Slot 50 x 50 Grey 1.7 mtrs
ELTR5075GS	Trunking Open Slot 50 x 75 Grey 1.7 mtrs
ELTR7575GS	Trunking Open Slot 75 x 75 Grey 1.7 mtrs
ELTR7550GS	Trunking Open Slot 75 x 50 Grey 1.7 mtrs
ELTR10050GS	Trunking Open Slot 100 x 50 Grey 1.7 mtrs
ELTR10075GS	Trunking Open Slot 100 x 75 Grey 1.7 mtrs

TECHNICAL DATA

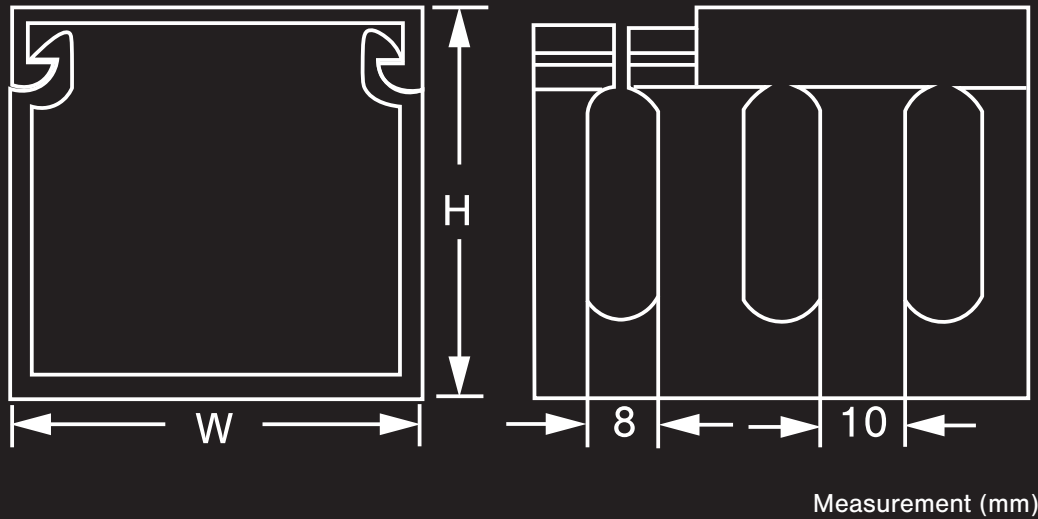

ESC Code	W (mm)	H (mm)
ELTR2550GS	25	50
ELTR2575GS	25	75
ELTR5050GS	50	50
ELTR5075GS	50	75
ELTR7575GS	75	75
ELTR7550GS	75	50
ELTR10050GS	100	50
ELTR10075GS	100	75

Elmark Trucking is compliant to standards and meets all test requirements for NZ

Property	Test Method	Result	
Mechanical Property	Impact Strength Tensile Strength	ASTM D256 ASTM D638	10kg-cm/cm ² 500kg/cm ²
Thermal Property	Heat Deflection Temperature Softening Temperature	ASTM D648 ASTM D1525	65°C 86°C
Thermal Property	Flammability	UL94	V-0