

Stanilite®

Economy exit LED - base



Range

Economy range



Product group

Exit LED

Features

- LED technology 75,000 hours lamp life
- Low power consumption and LED light source for reduced operation and maintenance costs
- High temperature rated Lithium iron phosphate battery
- Strong, lightweight, UV/FR ABS body and gear tray
- Wall or ceiling mount
- IP20 rating
- Switched active input available for mains switching
- Large terminal block (16mm²) for easy wiring
- Designed for direct replacement of installed 10W economy exit EE110M and EE210S, and economy exit LED ECOLED
- Retrofit capability; gear tray fits into existing 10W economy exit EE110M and EE210S base
- Main body and gear tray only, diffuser not included (can be ordered separately)

Catalogue no.	Description
Standard products	
ECOEXITBASE	Economy exit LED base
Accessories	
ECOEXITDIFWM	Diffuser wall mount pictograph
ECOEXITDIFCM	Diffuser ceiling mount pictograph
Spare parts	
03-01228	Battery LiFePO4 6.4V 1.5Ah

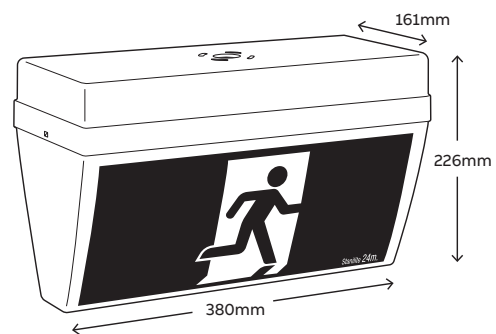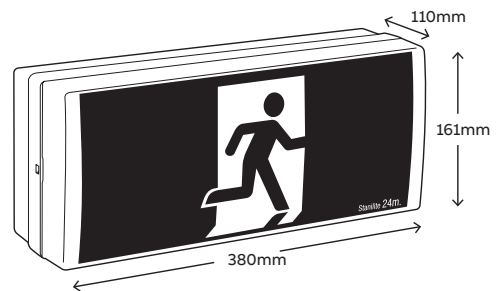

Dimensions

Model	Length	Width (incl. diffuser)	Height
Wall mount	380mm	110mm	161mm
Ceiling mount	380mm	161mm	226mm

Weight

Model	Weight
Standard	1.4kg

Construction

Part	Construction
Body	Moulded UV/FR ABS
Diffuser	Moulded acrylic

Light source			
	Model	Light source	
	Standard	Multiple LED strip	
Power consumption			
	Model	Power consumption	
	Standard	6.5W	
Photometrics			
	Model	Class	Classification
	Wall mount	C0	E2
		C90	E2
	Ceiling mount	C0	D5
		C90	D5

Note: Preliminary results

Note:

- Designed to comply with AS2293 and meet relevant Australian EMC standards