

Stanilite®

Platinum exit LED weatherproof



Range

Platinum range

Product group


Exit LED



Features

- LED technology 100,000 hours plus lamp life
- Low power consumption and LED light source for reduced operation and maintenance costs
- IP65 weatherproof enclosure
- Advanced charging technology combined with Lithium iron phosphate battery for long life and low maintenance
- UV stabilised vandal resistant (IK08) polycarbonate cover
- Surface mount
- Removable gear tray for easy installation and maintenance

Catalogue no.	Description
EM products	
PWEXLEDP-1	Platinum exit LED weatherproof picto
PWEXLEDP-2	Platinum exit LED weatherproof <picto
PWEXLEDP-3	Platinum exit LED weatherproof picto>
Spare parts	
03-01301P	Battery LiFePO4 3.2V 3.2Ah
31-PWE1	DIFF PWEX PICTO 24m INC CLR LID
31-PWE2	DIFF PWEX <PICTO 24m INC CLR LID
31-PWE3	DIFF PWEX PICTO> 24m INC CLR LID

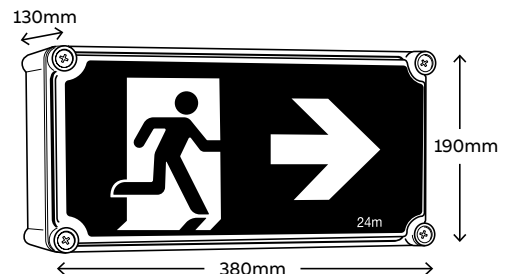

Dimensions			
	Length	Width	Height
	380mm	130mm	190mm
Weight			
	Model	Weight	
	EM	2.0kg	
Construction			
	Part	Construction	
	Enclosure	Polycarbonate	
	Gear tray	White powder coated zinc steel	

Light source			
	Model	Light source	
	EM	Multiple LED 1.6W	

Power consumption			
	Model	Power consumption	
	EM	3.2W	

Note: Preliminary results

Photometrics			
	Model	Class	Classification
	EM	C0	D1.25
		C90	C1.25

Note: Preliminary results

Note:

- Designed to comply with AS2293 and meet relevant Australian EMC standards