

Stanilite®

Platinum Spitfire® LED surface mount non-maintained



Range

Platinum range

Product group


Spitfire LED



Features

- Superior photometric classification
- COB LED technology 100,000 hours plus lamp life
- Wide area coverage optics
- Low power consumption and COB LED light source for reduced operation and maintenance costs
- LiFePO4 (Lithium iron phosphate) battery combined with advanced battery charging technology for longer life
- Surface mount
- Low maintenance - ideal for factories and warehouses

| Catalogue no. | Description |
|--------------------|---|
| EM products | |
| SFB1LEDP | Platinum Spitfire D40 COB LED WA optics surface mount |
| SFB2LEDP | Platinum Spitfire D63 COB LED WA optics surface mount |
| Spare parts | |
| 03-01301P | 1LED with 2 Wire connection |
| 03-01310PB | 1LED/D40 COB with 3 wire connection |
| 03-01303P | 2LED/D63 COB with 2 wire connection |
| 03-01311PB | 2LED/D63 COB with 3 wire connection |

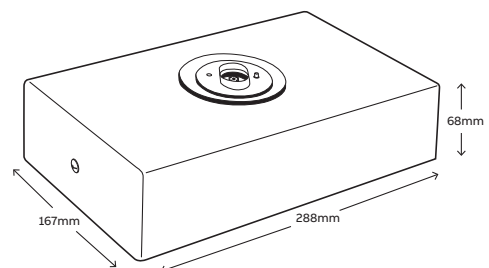

| Dimensions | | | |
|-------------------|---------------------------|-------|--------|
| | Length | Width | Height |
| | 288mm | 167mm | 68mm |
| Weight | | | |
| Model | Weight | | |
| EM | 2.2kg | | |
| Construction | | | |
| Part | Construction | | |
| Lamp head | White polycarbonate | | |
| Surface mount box | White powder coated steel | | |

| Light source | | |
|---------------------|--------------|---------------------|
| | Model | Light source |
| | D40 COB LED | 2W |
| | D63 COB LED | 3W |

| Power consumption | | |
|--------------------------|--------------|--------------------------|
| | Model | Power consumption |
| | EM | 1.0W |

Note: Preliminary results

| Photometrics | | | |
|---------------------|--------------|--------------|-----------------------|
| | Model | Class | Classification |
| | D40 COB LED | C0 | D40 |
| | | C90 | D40 |
| | D63 COB LED | C0 | D63 |
| | | C90 | D63 |

Note:

- Designed to comply with AS2293 and meet relevant Australian EMC standards