

# TF65-28

## General Information

<b>Extended Product Type:</b>	TF65-28
<b>Product ID:</b>	1SAZ811201R1001
<b>EAN:</b>	4013614482915
<b>Catalog Description:</b>	TF65-28 Thermal Overload Relay
<b>Long Description:</b>	The TF65-28 thermal overload relay is an economic electromechanical protection device for the main circuit. It offers reliable and fast protection for motors in the event of overload or phase failure. The device has trip class 10. Further features are the temperature compensation, trip contact (NC), signal contact (NO), automatic- or manual reset selectable, trip-free mechanism, STOP function and a trip indication. The overload relays are connected directly to the block contactors. Single mounting kits are available as accessory.

## Categories

Products » Low Voltage Products and Systems » Control Products » Contactors » Thermal Overload Relays

## Ordering

<b>Minimum Order Quantity:</b>	1 piece
<b>Customs Tariff Number:</b>	85364900

## Dimensions

<b>Product Net Width:</b>	54.9 mm
<b>Product Net Height:</b>	101.4 mm
<b>Product Net Depth / Length:</b>	106.9 mm
<b>Product Net Weight:</b>	0.372 kg

## Popular Downloads

<b>Data Sheet, Technical Information:</b>	<a href="#">2CDC106069D0201</a>
<b>Data Sheet, Technical Information (Part 2):</b>	<a href="#">1SAZ800502F0003</a>
<b>Data Sheet, Technical Information (Part 3):</b>	<a href="#">1SAZ800503</a> <a href="#">1SAZ800506</a>
<b>Instructions and Manuals:</b>	<a href="#">2CDC106051M6803</a>
<b>Instructions and Manuals (Part 2):</b>	<a href="#">2CDC106085M6801</a>
<b>Dimension Diagram:</b>	<a href="#">1SAZ800401F0001</a>

## Technical

<b>Setting Range:</b>	22 ... 28 A
<b>Rated Operational Voltage:</b>	Auxiliary Circuit 600 V AC/DC Main Circuit 690 V AC Main Circuit 440 V DC

**Rated Operational Current** 28 A**(I<sub>e</sub>):****Rated Operational Current** 28 A**AC-3 (I<sub>e</sub>):**

<b>Rated Frequency (f):</b>	Auxiliary Circuit 50 Hz
	Auxiliary Circuit 60 Hz
	Auxiliary Circuit DC
	Main Circuit 50 Hz
	Main Circuit 60 Hz

<b>Rated Impulse Withstand Voltage (U<sub>imp</sub>):</b>	Auxiliary Circuit 6 kV
	Main Circuit 8 kV

<b>Rated Insulation Voltage (U<sub>i</sub>):</b>	690 V
--	-------

<b>Number of Poles:</b>	3
-------------------------	---

<b>Number of Auxiliary Contacts NC:</b>	1
---	---

<b>Number of Auxiliary Contacts NO:</b>	1
---	---

<b>Number of Protected Poles:</b>	3
-----------------------------------	---

<b>Conventional Free-air Thermal Current (I<sub>th</sub>):</b>	Auxiliary Circuit NC 6 A
	Auxiliary Circuit NO 4 A

<b>Rated Operational Current AC-15 (I<sub>e</sub>):</b>	(120 V) NC 3 A
	(120 V) NO 0.75 A
	(240 V) NC 3 A
	(240 V) NO 0.75 A
	(400 V) NC 0.75 A
	(400 V) NO 0.75 A
	(500 V) NC 0.75 A
	(500 V) NO 0.75 A

<b>Rated Operational Current DC-13 (I<sub>e</sub>):</b>	(125 V) NC 0.55 A
	(125 V) NO 0.55 A
	(24 V) NC 1.25 A
	(24 V) NO 1.25 A
	(250 V) NC 0.27 A
	(250 V) NO 0.27 A
	(500 V) NC 0.15 A
	(500 V) NO 0.15 A
	(60 V) NC 0.55 A
	(60 V) NO 0.55 A

<b>Degree of Protection:</b>	Housing IP20
	Main Circuit Terminals IP10

<b>Pollution Degree:</b>	3
--------------------------	---

<b>Connecting Capacity Auxiliary Circuit:</b>	Flexible with Ferrule 1/2x 0.75 ... 2.5 mm <sup>2</sup>
	Flexible with Insulated Ferrule 1x 0.75 ... 2.5 mm <sup>2</sup>
	Flexible with Insulated Ferrule 2x 0.75 ... 1.5 mm <sup>2</sup>
	Flexible 1/2x 0.75 ... 1 mm <sup>2</sup>
	Flexible 1/2x 1 ... 2.5 mm <sup>2</sup>
	Rigid 1/2x 0.75 ... 4 mm <sup>2</sup>

**Connecting Capacity Main Circuit:** Flexible with Ferrule 1/2x 2.5 ... 10 mm<sup>2</sup>  
 Flexible with Ferrule 1x 2.5 ... 35 mm<sup>2</sup>  
 Flexible with Insulated Ferrule 1x 2.5 ... 35 mm<sup>2</sup>  
 Flexible with Insulated Ferrule 1/2x 2.5 ... 10 mm<sup>2</sup>  
 Flexible 1/2x 2.5 ... 16 mm<sup>2</sup>  
 Flexible 1x 2.5 ... 35 mm<sup>2</sup>  
 Rigid 1/2x 2.5 ... 16 mm<sup>2</sup>  
 Rigid 1x 2.5 ... 35 mm<sup>2</sup>

**Tightening Torque:** Auxiliary Circuit 1 ... 1.2 N·m  
 Main Circuit 4.0 ... 4.5 N·m

**Wire Stripping Length:** Auxiliary Circuit 9 mm  
 Main Circuit 17 mm

**Recommended Screw Driver:** Auxiliary Circuit Pozidriv 2  
 Main Circuit Pozidriv 2

**Mounting Position:** Position 1 to 6

**Power Loss:** at Rated Operating Conditions per Pole 1.9 ... 3.1 W

**Suitable For:** AF40  
 AF52  
 AF65

**Standards:** IEC/EN 60947-1  
 IEC/EN 60947-4-1  
 IEC/EN 60947-5-1  
 UL 60947-1  
 UL 60947-4-1

## Environmental

**Ambient Air Temperature:** Operation -40 ... +70 °C  
 Operation Compensated -40 ... +70 °C  
 Storage -50 ... +80 °C

**Ambient Air Temperature Compensation:** Yes

**Maximum Operating Altitude Permissible:** 2000 m

**Resistance to Shock acc. to IEC 60068-2-27:** 11 ms Pulse 25g

**Resistance to Vibrations acc. to IEC 60068-2-6:** 5g / 3 ... 150 Hz

**RoHS Status:** Following EU Directive 2011/65/EU

## Technical UL/CSA

**Maximum Operating Voltage UL/CSA:** Main Circuit 600 V AC

**Ampere Rating UL/CSA:** 28 A

**Contact Rating UL/CSA:** (NC:) B600  
 (NC:) Q600  
 (NO:) Q600  
 (NO:) D300

**Connecting Capacity Main Circuit UL/CSA:** Flexible 1x 12-2 AWG  
 Flexible 2x 12-6 AWG

Stranded 1x 12-2 AWG

Stranded 2x 12-6 AWG

<b>Connecting Capacity</b>	Flexible 1/2x 18-12 AWG
<b>Auxiliary Circuit UL/CSA:</b>	Stranded 1/2x 18-12 AWG
<b>Tightening Torque UL/CSA:</b>	Auxiliary Circuit 9 ... 11 in·lb Main Circuit 35 ... 40 in·lb

## Certificates and Declarations (Document Number)

<b>ABS Certificate:</b>	<a href="#"><u>1SAA941003-0101</u></a>
<b>ATEX Certificate:</b>	<a href="#"><u>1SAA941005-3901</u></a>
<b>BV Certificate:</b>	<a href="#"><u>1SAA941001-0202</u></a>
<b>CB Certificate:</b>	<a href="#"><u>1SAA941015-2001</u></a>
<b>CCC Certificate:</b>	<a href="#"><u>1SAA941012-3801</u></a>
<b>cUL Certificate:</b>	<a href="#"><u>cUL_E48139</u></a>
<b>Declaration of Conformity - CE:</b>	<a href="#"><u>1SAD938507-0187</u></a>
<b>DNV GL Certificate:</b>	<a href="#"><u>1SAA941004-0301</u></a>
<b>EAC Certificate:</b>	<a href="#"><u>1SAA941002-2701</u></a>
<b>GOST Certificate:</b>	<a href="#"><u>1SAA941001-2701</u></a>
<b>Instructions and Manuals:</b>	<a href="#"><u>2CDC106051M6803</u></a>
<b>LR Certificate:</b>	<a href="#"><u>1SAA941003-0501</u></a>
<b>RINA Certificate:</b>	<a href="#"><u>RINA_ELE098115XG</u></a>
<b>RMRS Certificate:</b>	<a href="#"><u>1SAA941002-0701</u></a>
<b>RoHS Information:</b>	<a href="#"><u>1SAD938507-0187</u></a>
<b>UL Certificate:</b>	<a href="#"><u>UL_E48139</u></a>


## Container Information

<b>Package Level 1 Units:</b>	1 piece
<b>Package Level 1 Width:</b>	123 mm
<b>Package Level 1 Height:</b>	121 mm
<b>Package Level 1 Depth / Length:</b>	82 mm
<b>Package Level 1 Gross Weight:</b>	0.456 kg
<b>Package Level 1 EAN:</b>	4013614482915
<b>Package Level 2 Units:</b>	12 piece
<b>Package Level 2 Width:</b>	280 mm
<b>Package Level 2 Height:</b>	210 mm
<b>Package Level 2 Depth / Length:</b>	395 mm
<b>Package Level 2 Gross Weight:</b>	5.858 kg
<b>Package Level 2 EAN:</b>	4013614485312

## Classifications

<b>Object Classification Code:</b>	F
<b>E-nummer:</b>	3210263
<b>ETIM 4:</b>	EC000106 - Thermal overload relay

<b>ETIM 5:</b>	EC000106 - Thermal overload relay
<b>ETIM 6:</b>	EC000106 - Thermal overload relay
<b>ETIM 7:</b>	EC000106 - Thermal overload relay
<b>eClass:</b>	7.0 27371501
<b>UNSPSC:</b>	39121521

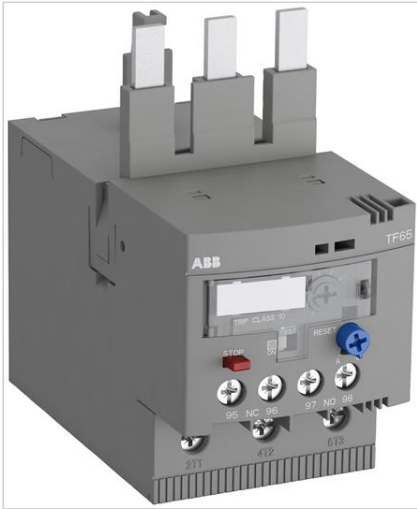

---

© Copyright 2018 ABB